

08-17-00

A

NEW, CONTINUATION, DIVISIONAL OR
CONTINUATION-IN-PART APPLICATION
UNDER 37 C.F.R. §1.53(b)

Attorney Docket No. 7784000129

Express Mail Label No. EL581389026US

Date August 16, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Hon. Commissioner of Patents and Trademarks
Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is a patent application for METHOD AND APPARATUS FOR PROVIDING BI-DIRECTIONAL DATA SERVICES AND LIVE TELEVISION PROGRAMMING TO MOBILE PLATFORMS.

identified by: ☐ First named inventor _____
or ☒ Attorney Docket No. (see above)

1. Type of Application

☒ This application is a new (non-continuing) application.

☐ This application is a ☐ continuation / ☐ divisional / ☐ continuation-in-part of prior application No. _____. Amend the specification by inserting before the first line the sentence:

--This is a [continuation/division/continuation-in-part] of United States patent application No. _____, filed _____.--

☐ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

If for some reason applicant has not requested a sufficient extension of time in the parent application, and/or has not paid a sufficient fee for any necessary response in the parent application and/or for the extension of time necessary to prevent the abandonment of the parent application prior to the filing of this application, please consider this as a Request for an Extension for the required time period and/or authorization to charge our Deposit Account No. 08-0750 for any fee that may be due. THIS FORM IS BEING FILED IN TRIPLICATE: one copy for this application; one copy for use in connection with the Deposit Account (if applicable); and one copy for the above-mentioned parent application (if any extension of time is necessary).

2. Contents of Application

a. Specification of 40 pages;

- ☐ A microfiche computer program (Appendix);
☐ A nucleotide and/or amino acid sequence submission;

☐ Because the enclosed application is in a non-English language, a verified English translation ☐ is enclosed ☐ will be filed.

☐ Cancel original claims _____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing date purposes.)

b. ☒ Drawings on 2 sheets;

Attorney Docket No. 7784000129

Express Mail Label No. EL581389026US

Date August 16, 2000

- c. ☒ A signed Oath/Declaration ☐ is enclosed / ☒ will be filed in accordance with 37 C.F.R. §1.53(f).

The enclosed Oath/Declaration is ☐ newly executed / ☐ a copy from a prior application under 37 C.F.R. §1.63(d) / ☐ accompanied by a statement requesting the deletion of person(s) not inventors in the continuing application.

d. **Fees**

FILING FEE	Number		Number		Basic Fee	
CALCULATION	Filed		Extra	Rate		\$690.00
Total Claims	23	- 20 =	3	x	\$18.00 =	\$54.00
Independent Claims	6	- 3 =	3	x	\$78.00 =	\$234.00
Multiple Dependent Claim(s) Used					\$260.00 =	
FILING FEE - NON-SMALL ENTITY						
FILING FEE - SMALL ENTITY: Reduction by 1/2						
<input type="checkbox"/> Verified Statement under 37 C.F.R. §1.27 is enclosed.						
<input type="checkbox"/> Verified Statement filed in prior application.						
Assignment Recordal Fee (\$40.00)						
37 C.F.R. §1.17(k) Fee (non-English application)						
TOTAL						\$978.00

- ☐ A check is enclosed to cover the calculated fees. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to Deposit Account No. 08-0750. A duplicate copy of this document is enclosed.
- ☒ The calculated fees will be paid within the time allotted for completion of the filing requirements.
- ☐ The calculated fees are to be charged to Deposit Account No. 08-0750. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to said Deposit Account. A duplicate copy of this document is enclosed.

3. **Priority Information**

- ☐ **Foreign Priority:** Priority based on _____ Application No. _____, filed _____, is claimed.
- ☐ A copy of the above referenced priority document ☐ is enclosed / ☐ will be filed in due course, pursuant to 35 U.S.C. §119(a)-(d).
- ☐ **Provisional Application Priority:** Priority based on United States Provisional Application No. _____, filed _____, is claimed under 35 U.S.C. §119(e).

Attorney Docket No. 7784000129

Express Mail Label No. EL581389026US

Date August 16, 2000

4. Other Submissions

☐ A Preliminary Amendment is enclosed.

☐ An Information Disclosure Statement, _____ sheets of PTO Form 1449, and _____ patent(s)/publications/documents are enclosed.

☒ A power of attorney

☒ is submitted ☒ with the new Oath/Declaration.

☐ is of record in the prior application and ☐ is in the original papers / ☐ a copy is enclosed.

☐ An Assignment of the invention

☐ is enclosed with a cover sheet pursuant to 37 C.F.R. §§3.11, 3.28 and 3.31.

☐ is of record in a prior application. The assignment is to _____, and is recorded at Reel _____, Frame(s) _____.

☐ An Establishment of Assignee's Right To Prosecute Application Under 37 C.F.R. §3.73(b), and Power Of Attorney is enclosed.

☒ An Express Mailing Certificate is enclosed.

☐ Other: _____

Attention is directed to the fact that the correspondence address for this application is:

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600.

Respectfully,



Mark D. Elchuk
Reg. No. 33,686

Date: August 16, 2000
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600

HARNES, DICKEY & PIERCE, P.L.C.

ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-1600

TELEFACSIMILE
(248) 641-0270

Date: August 16, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

EXPRESS MAILING CERTIFICATE

Applicant: Bengault et al

Serial No. (if any): --

For: METHOD AND APPARATUS FOR PROVIDING
BI-DIRECTIONAL DATA SERVICES AND
LIVE TELEVISION PROGRAMMING TO
MOBILE PLATFORMS


Docket: 7784-000129

Attorney: Mark D. Elchuk

"Express Mail" Mailing Label Number EL581389026US

Date of Deposit August 16, 2000

I hereby certify and verify that the Request for a patent application (in triplicate); 40 page patent application; unexecuted Declaration and Power of Attorney; 2 sheets of informal drawings (Figs. 1-2) and post card are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and are addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



Signature of Person Mailing Document(s)

HARNES, DICKEY & PIERCE, P.L.C.

ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-1600

TELEFACSIMILE
(248) 641-0270

Date: August 16, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

EXPRESS MAILING CERTIFICATE

Applicant: Bengault et al

Serial No. (if any): --

For: METHOD AND APPARATUS FOR PROVIDING
BI-DIRECTIONAL DATA SERVICES AND
LIVE TELEVISION PROGRAMMING TO
MOBILE PLATFORMS

Docket: 7784-000129

Attorney: Mark D. Elchuk

"Express Mail" Mailing Label Number EL581389026US

Date of Deposit August 16, 2000

I hereby certify and verify that the Request for a patent application (in triplicate); 40 page patent application; unexecuted Declaration and Power of Attorney; 2 sheets of informal drawings (Figs. 1-2) and post card are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and are addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



Signature of Person Mailing Document(s)

**METHOD AND APPARATUS FOR PROVIDING
BI-DIRECTIONAL DATA SERVICES AND LIVE
TELEVISION PROGRAMMING TO MOBILE PLATFORMS**

TECHNICAL FIELD

This invention relates to worldwide systems for supplying live television programming and bi-directional data services to mobile platforms, such as aircraft, using satellite communication.

BACKGROUND OF THE INVENTION

5 Broadband data and video services, on which our society and economy have grown to depend, have heretofore generally not been readily available to users on board mobile platforms such as aircraft, ships, trains, automobiles, etc. While the technology exists to deliver such services to all forms of mobile platforms, past solutions have been generally quite expensive, low data rate and/or available to only
10 very limited markets of government/military users and some high-end maritime markets (i.e., cruise ships).

At present, a wide variety of broadcast television (TV) services are available

to terrestrial users via satellite links. Such services include commercial Direct Broadcast Satellite (DBS) services (such as DirecTV® and EchoStar®) and custom video, such as rebroadcast video, over private Fixed Satellite Services (FSS) or Broadcast Satellite Services (BSS) satellites. The data services which can be
5 provided via satellite link include all conventional Internet services (e.g., email, web browsing, NetMeeting, etc.), as well as virtual private networks (VPNs) for corporate and government customers.

Previously developed systems which have attempted to provide live TV and data services to mobile platforms have done so with only limited success. One major
10 obstacle has been the high cost of access to such broadband data and video services. Another problem is the limited capacity of previously developed systems, which is insufficient for mobile platforms carrying dozens, or even hundreds, of individuals who each may be simultaneously requesting different channels of programming or different data services. Furthermore, presently existing systems are
15 generally not readily scalable to address the demands of the traveling public.

Certain services currently available provide a limited subset of the above described services. One such service provides a narrow-bandwidth Internet connection to users on a mobile platform. Another service provides either TV broadcast services from available direct broadcast signals (i.e., EchoStar® and
20 DirecTV®) or provides a custom TV broadcast signal through dedicated satellite links (i.e., Airshow®). However, no system or method presently exists for providing high

speed (i.e., greater than 64 Kbps) data networking services to groups of users on mobile or remote platforms, let alone for providing such high-speed networking services together with video services.

There are several operational systems that provide limited Internet data
5 services on commercial airlines and cruise ships. These systems are very limited in their link capability (primarily use communication links developed for telephony) and the service is very expensive (greater than about \$1.00 per minute for voice connection). For these reasons, and in view of adherent limitations on the capacity of such systems, such systems have met with limited commercial success and
10 acceptance.

Current operational systems generally use Inmarsat satellite communication links or terrestrial wireless communication links (i.e., the National Air Telephone System "NATS") to achieve 2-way connectivity to mobile platforms. These connection forms have several drawbacks:

- 15
- 1) a limited connection bandwidth (typically less than 64 Kbps);
 - 2) limited overall system capacity (due to limited frequency spectrum); and
 - 3) high expense.

20 Inmarsat operates in the L-band frequency spectrum, where there is very little bandwidth and capacity available for providing broadband services to the traveling

public. NATS based solutions (i.e., GTE Airfone®, AT&T Claircom), familiar to domestic airline travelers who use seat back-mounted telephones, also provide very limited capacity because of operation at L-band. These systems also suffer from the additional problem that connectivity is only available over land.

- 5 Current mobile platform connection methods are inherently narrow band and restrict the flow of data to the point where common networking tasks are impossible. Typically, this connectivity is achieved through the use of a standard computer telephone modem between the user's computer and the air-ground or ship-shore telephony system. In this scenario, each user gets exclusive use of a full
10 communications channel for the duration of his/her networking session and effectively prevents others from using that portion of the telephony system.

One other service that has received some attention is a service that provides pre-stored world-wide-web content to users on a mobile platform. This service is anticipated to incorporate a server located on a mobile platform to provide its stored
15 content to users on the mobile platform through a simple touchscreen interface. The content located on the server would be updated once every few weeks while the mobile platform is in an inactive mode, such as when an aircraft is parked at an airport gate or a ship is docked at a port. The update of the data on the mobile platform would be accomplished through the loading of CDROMS or swapping of hard
20 drives on the server. Although the content stored on the mobile platform with this service can be varied, it will never be timely.

In view of the foregoing, there is a significant need to provide a system and method for providing live television programming and bi-directional data communication to users onboard mobile platforms via one or more satellite links. More specifically, there is a need to provide Internet data communication, Direct
5 Broadcast Satellite Services via BSS satellites, and rebroadcast video of live television programming via Ku or Ka-band satellites to a plurality of users onboard one or more mobile platforms, and in a manner which allows each user to request and receive Internet or other forms of real time data, as well specific live programming which he/she desires to view.

10 There is also a need to provide a system and method for enabling hundreds or more mobile platforms, such as aircraft, to communicate with a plurality of satellites, where each satellite includes a plurality of independent transponders, such that each mobile platform can communicate with an assigned transponder to permit bi-directional data communications by each passenger and viewing by each
15 passenger of selected live TV programming.

SUMMARY OF THE INVENTION

The present invention is directed by a method and apparatus for providing television and data services to mobile platforms, in accordance with preferred embodiments of the present invention. In one preferred embodiment, the system of

the present invention makes use of a ground based segment for receiving video and data content and transmitting the content using radio frequency signals in accordance therewith via a ground based antenna to a space segment. The space segment includes a satellite incorporating at least one transponder, and more preferably a plurality of independent transponders, which receives the radio frequency (RF) signals transmitted from the antenna of the ground segment and relays these signals to at least one mobile system, and more typically to a large plurality of mobile systems, using the satellite-based transponders. Each mobile system is located on a mobile platform (e.g., aircraft, ship, etc.) and receives the RF signals from at least one of the satellite transponders and distributes the transponded video and data content to individual users in accordance with selections made by the users. Thus, each user only receives the video programming and/or data content that he/she specifically selected or requested.

Optionally, but preferably, the ground-based segment includes at least one dedicated link to an Internet service provider. One or more dedicated links may also be provided to various private/corporate Intranet accounts. A content management center in the ground segment is also in communication with a network operations center thereof for controlling transmission of the live television programming and other data to the space segment.

All information sent from the ground station to the mobile platform is broadcast over the entire coverage region of the satellite transponder. Each satellite is located

in a geostationary orbit (GSO) or in a non-geostationary (NGSO) orbit. Packet multiplexing is preferably used to provide multiple simultaneous access to a plurality of users on each mobile platform.

5 The mobile system incorporates a suitable antenna system for effecting bi-directional communications with its assigned transponder. In one preferred form, the antenna system comprises a steerable antenna carried by the mobile platform for receiving and transmitting RF signals to and from the satellites within the coverage region. The antenna system is coupled to a receiver which decodes and demodulates the received RF signals to produce digital video and audio, as well as data
10 content signals. These signals are preferably provided in the form of packets, and fed to a router which filters the packets such that only content selected/requested by users on the mobile platform is distributed to the users. In this context users are defined as passengers, cabin crew, cockpit crew, maintenance crew, and non-human entities such as unattended data devices. A distribution system routes the data
15 content directly to the proper users at access stations associated independently with each user, or to designated components (such as overhead monitors) located throughout the mobile platform. Thus, each user or occupant receives only the specific data content (i.e., either data or TV programming) that he/she has requested, or the data content can simply be provided to all passengers on the mobile platform.

20 The method and apparatus of the present invention thus provides the ability to conduct bi-directional data communications between a plurality of independent

mobile platforms, where each user on each mobile platform is able to independently request and obtain Internet data or other forms of data in real time. The present invention further enables the users to independently request and view selected channels of live TV programming.

5 BRIEF DESCRIPTION OF THE DRAWINGS

The various advantages of the present invention will become apparent to one skilled in the art by reading the following specification and subjoined claims and by referencing the following drawings in which:

Figure 1 is a simplified block diagram drawing illustrating the three major
10 components of the system of the present invention; and

Figure 2 is a block diagram of the mobile system carried on each mobile platform.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, there is shown a system 10 in accordance with a preferred embodiment of the present invention for providing data content to and from a plurality of moving platforms 12a-12f in one or more distinct coverage regions 14a and 14b. The system 10 generally comprises a ground segment 16, a plurality of satellites 18a-18f forming a space segment 17, and a mobile system 20 disposed on each moving platform 12. The moving platforms could comprise aircraft, cruise ships or any other moving vehicle. Thus, the illustration of the moving platforms 18 as aircraft in the figures herein, and the reference to the mobile platforms as aircraft throughout the following description should not be construed as limiting the applicability of the system 10 to only aircraft.

The space segment 17 may include any number of satellites 18 in each coverage region 14a and 14b needed to provide coverage for each region. Satellites 18a, 18b, 18d and 18e are preferably Ku or Ka-band satellites. Satellites 18c and 18f are Broadcast Satellite Services (BSS) satellites. Each of the satellites 18 are further located in a geostationary orbit (GSO) or a non-geostationary orbit (NGSO). Examples of possible NGSO orbits that could be used with this invention include low Earth orbit (LEO), medium Earth orbit (MEO) and highly elliptical orbit (HEO). Each of the satellites 18 includes at least one radio frequency (RF) transponder, and more preferably a plurality of RF transponders. For example satellite 18a is illustrated

having four transponders 18a₁-18a₄. It will be appreciated that each other satellite 18 illustrated could have a greater or lesser plurality of RF transponders as required to handle the anticipated number of mobile platforms 12 operating in the coverage area. The transponders provide "bent-pipe" communications between the aircraft 12 and the ground segment 16. The frequency bands used for these communication links could comprise any radio frequency band from approximately 10MHz to 100GHz. The transponders preferably comprise Ku-band transponders in the frequency band designated by the Federal Communications Commission (FCC) and the International Telecommunications Union (ITU) for fixed satellite services FSS or BSS satellites. Also, different types of transponders may be employed (i.e., each satellite 18 need not include a plurality of identical types of transponders) and each transponder may operate at a different frequency. Each of the transponders 18a₁-18a₄ further include wide geographic coverage, high effective isotropic radiated power (EIRP) and high gain/noise temperature (G/T).

With further reference to Figure 1, the ground segment 16 includes a ground station 22 in bi-directional communication with a content center 24 and a network operations center (NOC) 26. A second ground station 22a located in the second coverage area 14b may be used if more than one distinct coverage area is required for the service. In this instance, ground station 22a would also be in bi-directional communication with the NOC 26 via a terrestrial ground link or any other suitable means for establishing a communication link with the NOC 26. The ground station

22a would also be in bi-directional communication with a content center 24a. For the purpose of discussion, the system 10 will be described with respect to the operations occurring in coverage region 14a. However, it will be understood that identical operations relative to the satellites 18d-18f occur in coverage region 14b. It will also
5 be understood that the invention may be scaled to any number of coverage regions 14 in the manner just described.

The ground station 22 comprises an antenna and associated antenna control electronics needed for transmitting data content to the satellites 18a and 18b. The antenna of the ground station 22 may also be used to receive data content
10 transponded by the transponders 18a₁ - 18a₄ originating from each mobile system 20 of each aircraft 12 within the coverage region 14a. The ground station 22 may be located anywhere within the coverage region 14a. Similarly, ground station 22a, if incorporated, can be located anywhere within the second coverage area 14b.

The content center 24 is in communication with a variety of external data
15 content providers and controls the transmission of video and data information received by it to the ground station 22. Preferably, the content center 24 is in contact with an Internet service provider (ISP) 30, a video content source 32 and a public switched telephone network (PSTN) 34. Optionally, the content center 24 can also communicate with one or more virtual private networks (VPNs) 36. The ISP 30
20 provides Internet access to each of the occupants of each aircraft 12. The video content source 32 provides live television programming, for example, Cable News

Network[®] (CNN) and ESPN[®]. The NOC 24 performs traditional network management, user authentication, accounting, customer service and billing tasks. The content center 24a associated with the ground station 22a in the second coverage region 14b would also preferably be in communication with an ISP 38, a video content provider 40, a PSTN 42, and optionally a VPN 44. An optional air telephone system 28 may also be included as an alternative to the satellite return link.

Referring now to Figure 2, the mobile system 20 disposed on each aircraft 18 will be described in greater detail. Each mobile system 20 includes a data content management system in the form of a router/server 50 (hereinafter "server") which is in communication with a communications subsystem 52, a control unit and display system 54, and a distribution system in the form of a local area network (LAN) 56. Optionally, the server 50 can also be configured for operation in connection with a National Air Telephone System (NATS) 58, a crew information services system 60 and/or an in-flight entertainment system (IFE) 62.

The communications subsystem 52 includes a transmitter subsystem 64 and a receiver subsystem 66. The transmitter subsystem 64 includes an encoder 68, a modulator 70 and an Up-converter 72 for encoding, modulating and up-converting data content signals from the server 50 to a transmit antenna 74. The receiver subsystem 66 includes a decoder 76, a demodulator 78 and a down-converter 80 for decoding, demodulating and down-converting signals received by the receive antenna

82 into baseband video and audio signals, as well as data signals. While only one receiver subsystem 66 is shown, it will be appreciated that preferably a plurality of receiver subsystems 66 will typically be included to enable simultaneous reception of RF signals from a plurality of RF transponders. If a plurality of receiver
5 subsystems 66 are shown, then a corresponding plurality of components 76-80 will also be required.

The signals received by the receiver subsystem 66 are then input to the server 50. A system controller 84 is used to control all subsystems of the mobile system 20. The system controller 84, in particular, provides signals to an antenna controller 86
10 which is used to electronically steer the receive antenna 82 to maintain the receive antenna pointed at a particular one of the satellites 18, which will hereinafter be referred to as the "target" satellite. The transmit antenna 74 is slaved to the receive antenna 82 such that it also tracks the target satellite 18. It will be appreciated that some types of mobile antennas may transmit and receive from the same aperture.
15 In this case the transmit antenna 74 and the receive antenna 82 are combined into a single antenna.

With further reference to Figure 2, the local area network (LAN) 56 is used to interface the server 50 to a plurality of access stations 88 associated with each seat location on board the aircraft 12a. Each access station 88 can be used to interface
20 the server 50 directly with a user's laptop computer, personal digital assistant (PDA) or other personal computing device of the user. The access stations 88 could also

each comprise a seat back mounted computer/display. The LAN 56 enables bi-directional communication of data between the user's computing device and the server 50 such that each user is able to request a desired channel of television programming, access a desired website, access his/her email, or perform a wide
5 variety of other tasks independently of the other users on board the aircraft 12.

The receive and transmit antennas 82 and 74, respectively, may comprise any form of steerable antenna. In one preferred form, these antennas comprise electronically scanned, phased array antennas. Phased array antennas are especially well suited for aviation applications where aerodynamic drag is important
10 considerations. One particular form of electronically scanned, phased array antenna suitable for use with the present invention is disclosed in U.S. Patent no. 5,886,671, assigned to The Boeing Co.

Referring further to Figure 1, in operation of the system 10, the data content is preferably formatted into Internet protocol (IP) packets before being transmitted by
15 either the ground station 22, or from the transmit antenna 74 of each mobile system 20. For the purpose of discussion, a transmission of data content in the form of IP packets from the ground station 22 will be referred to as a "forward link" transmission. IP packet multiplexing is also preferably employed such that data content can be provided simultaneously to each of the aircraft 12 operating within the coverage
20 region 14a using unicast, multicast and broadcast transmissions.

The IP data content packets received by each of the transponders 18a₁ - 18a₄

are then transponded by the transponders to each aircraft 12 operating within the coverage region 14a. While multiple satellites 18 are illustrated over coverage region 14a, it will be appreciated that at the present time, a single satellite is capable of providing coverage to an area encompassing the entire continental United States.

5 Thus, depending upon the geographic size of the coverage region and the mobile platform traffic anticipated within the region, it is possible that only a single satellite incorporating a single transponder may be needed to provide coverage for the entire region. Other distinct coverage regions besides the continental United States include Europe, South/Central America, East Asia, Middle East, North Atlantic, etc. It is
10 anticipated that in service regions larger than the continental United States, that a plurality of satellites 18 each incorporating one or more transponders may be required to provide complete coverage of the region.

The receive antenna 82 and transmit antenna 74 are each preferably disposed on the top of the fuselage of their associated aircraft 18. The receive antenna 74 of
15 each aircraft receives the entire RF transmission of encoded RF signals representing the IP data content packets from at least one of the transponders 18a₁ - 18a₄. The receive antenna 82 receives horizontally polarized (HP) and vertically polarized (VP) signals which are input to at least one of the receivers 66. If more than one receiver 66 is incorporated, then one will be designated for use with a particular transponder
20 18a₁ - 18a₄ carried by the target satellite 18 to which it is pointed. The receiver 66 decodes, demodulates and down-converts the encoded RF signals to produce video

and audio signals, as well as data signals, that are input to the server 50. The server operates to filter off and discard any data content not intended for users on the aircraft 18 and then forwards the remaining data content via the LAN 56 to the appropriate access stations 88. In this manner, each user receives only that portion
5 of the programming or other information previously requested by the user. Accordingly, each user is free to request and receive desired channels of programming, access email, access the Internet and perform other data transfer operations independently of all other users on the aircraft 12a.

An advantage of the present invention is that the system 10 is also capable of
10 receiving DBS transmissions of live television programming (e.g., news, sports, weather, entertainment, etc.). Examples of DBS service providers include DirecTV® and Echostar®. DBS transmissions occur in a frequency band designated for broadcast satellite services (BSS) and are typically circularly polarized in North America. Therefore, a linear polarization converter may be optionally added to
15 receive antenna 82 for receiving broadcast satellite services in North America. The FSS frequency band that carries the data services and the BSS frequency band that carries DBS transmissions are adjacent to each other in the Ku-band. In one optional embodiment of the system 10, a single Ku-band receive antenna can be used to receive either DBS transmissions from DBS satellites 18c and 18f in the BSS band
20 or data services in the FSS band from one of the FSS satellites 18a or 18b, or both simultaneously using the same receive antenna 82. Simultaneous reception from

multiple satellites 18 is accomplished using a multi-beam receive antenna 82 or by using a single beam receive antenna 82 with satellites co-located in the same geostationary orbit slot.

Rebroadcast television or customized video services are received and
5 processed by the mobile system 20 in exactly the same way. Rebroadcast or customized video content is obtained from the video content source 32 and transmitted via the ground station 22 to the FSS satellites 18a and 18b. The video content is appropriately encoded for transmission by the content center 24 before being broadcast by the ground station 22. Some customization of the rebroadcast
10 content may occur on the server 50 (Figure 2) of the mobile system 20 to tailor advertisements and other information content to a particular market or interest of the users on the aircraft 12.

The bulk of data content provided to the users on each aircraft 12 is provided by using a private portal data content. This is implemented as a set of HTML pages
15 housed on the server 50 of each mobile system 20. The content is kept fresh by periodically sending updated portions from a ground-based server located in content center 24, and in accordance with a scheduling function controlled by the NOC 26 of the ground segment 16. The server 50 can readily be configured to accept user log-on information to support authentication and authorization of users and to keep track
20 of user and network accounting information to support a billing system. The authorization and accounting systems can be configured to communicate with the

ground segment 16 to transfer accumulated data at convenient intervals to the NOC 26.

The system 10 of the present invention also provides direct Internet connectivity via satellite links for a variety of purposes, such as when a user on board 5 the aircraft 12 desires to obtain data content that is not cached on server 50, or as an avenue for content sources to provide fresh content for the private portals. The server may be used to cache the most frequently requested web pages as well as to host a domain name system (DMS) look-up table of the most frequently accessed domains. The DMS look-up table is preferably maintained by the content center 24 10 and is periodically updated on the mobile system 20. Refreshing of the cached content of the portal may be accomplished by in-flight, periodic "pushed" cache refresh or at the gate of an airport terminal using any form of wired or wireless connection to the aircraft 18, or via a manual cache refresh by a crew member of the aircraft 12 carrying on board a CD ROM and inserting it into the cache server. The 15 invention 10 implements the in-flight periodic, pushed cache refresh updates over the satellite links. Preferably, refreshing of the cache content occurs during periods of low demand on the satellite links.

The optional air telephone system 28 can also be employed with the system 10 when line-of-sight links to the ground segments 16 are established to provide the 20 physical infrastructure. For example, an optional implementation incorporating an air telephone systems can be used for low data rate return links (2.4kbps to 9.6kbps).

It will be recognized that other regions, such as Europe and Asia, have similar air telephone systems that communicate with aircraft using terrestrial cellular communications links. Air telephone systems (e.g., NATS in North America) were designed for carrying telephony traffic, but have been adapted to pass single user per
5 call, point to point analog modem data. With the present invention, the aggregate return link traffic from the mobile system 20 is combined in server/router 50, a switch or a PBX (not shown) and then coupled into the air telephone return link via an analog modem or directly via a digital interface (e.g., CEPT-E1). Expanded capacity can be provided by establishing multiple simultaneous connections from the
10 router/switch into the air telephone system. Multi-link, point to point (PPP) data encapsulation can be used to accomplish the splitting/recombining of the data streams between the airborne and NOC routers. In addition to expanded capacity, the tolerance to a single connection failure is increased with multiple connections through the air telephone system. The hand-over between separate air telephone
15 system antenna towers is managed by the air telephone system and the connection between the respective air and ground routers is automatically maintained as the mobile platform traverses multiple coverage areas.

A significant anticipated application of the present invention is in connection with aircraft that fly extended periods of time over water and remote regions
20 (including polar regions) of the Earth where there is little or no current satellite transponder coverage. The present invention can operate with GSO satellites

launched in the future into orbit over oceans, or a new constellation of NGSO satellites to provide full Earth coverage (including the poles).

Referring further to Figure 1, a transmission of data content from the aircraft 12a to the ground station 22 will be described. This transmission is termed a "return link" transmission. The antenna controller 86 causes the transmit antenna 74 to maintain the antenna beam thereof pointed at the target satellite 18a. The channels used for communication from each mobile system 20 back to the ground station 22 represent point-to-point links that are individually assigned and dynamically managed by the NOC 26 of the ground segment 16. For the system 10 to accommodate several hundred or more aircraft 12, multiple aircraft will need to be assigned to each transponder carried by a given satellite 18. The preferred multiple access methods for the return link are code division multiple access (CDMA), frequency divisional multiple access (FDMA), time division multiple access (TDMA) or combinations thereof. Thus, multiple mobile systems 20 may be assigned to a single transponder 18a₁ - 18a₄. Where a greater number of aircraft 12 incorporating a mobile system 20 are operated within the coverage region 14a, then the number of transponders required increases accordingly.

The receive antenna 82 may implement a closed-loop tracking system for pointing the antenna beam and for adjusting the polarization of the antennas based on receive signal amplitude. The transmit antenna 74 is slaved to the point direction and polarization of the receive antenna 82. An alternative implementation could use

an open-loop tracking method with the pointing direction and polarization determined by knowledge of mobile platform position and attitude using an on-board inertial reference unit (IRU) and knowledge of the location of the satellites 18.

Encoded RF signals are transmitted from the transmit antenna 74 of the mobile system 20 of a given aircraft 12 to an assigned one of the transponders $18a_1 - 18a_4$, and transponded by the designated transponder to the ground station 22. The ground station 22 communicates with the content center 24 to determine and provide the appropriate data being requested by the user (e.g., content from the world wide web, email or information from the user's VPN).

An additional concern that must be taken into account with the system 10 is the potential for interference that may result from the small aperture size of the receive antenna 82. The aperture size of the receive antenna 82 is typically smaller than conventional "very small aperture terminal" (VSAT) antennas. Accordingly, the beam from the receive antenna 82 may encompass adjacent satellites along the geosynchronous arc. This can result in interference from satellites other than the target satellite being received by a particular mobile system 20. To overcome this potential problem, the system 10 preferably uses a lower than normal forward link data rate that overcomes the interference from adjacent satellites. For example, the system 10 operates at a preferred forward link data rate of at least about 5Mbps per transponder, using a typical FSS Ku-band transponder (e.g., Telstar-6) and an antenna having an active aperture of about 17 inches by 24 inches (43.18cm by

60.96cm). For comparison purposes, a typical Ku-band transponder usually operates at a data rate of approximately 30 Mbps using conventional VSAT antennas.

Using a standard digital video broadcast (DVB) waveform, the forward link signal typically occupies less than 8 MHz out of a total transponder width of 27 MHz.

5 However, concentrating the transponder power in less than the full transponder bandwidth could create a regulatory concern. FCC regulations presently regulate the maximum effective isotropic radiated power (EIRP) spectral density from a transponder to prevent interference between closely spaced satellites. Accordingly, in one preferred embodiment of the present invention, spread spectrum modulation
10 techniques are employed in modulator 70 to "spread" the forward link signal over the transponder bandwidth using well known signal spreading techniques. This reduces the spectral density of the transponded signal, thus eliminating the possibility of interference between two or more mobile systems 20.

It is also equally important that the transmit antenna 74 meets regulatory
15 requirements that prevent interference to satellites adjacent to the target satellite 18. The transmit antennas used in most mobile applications also tend to be smaller than conventional VSAT antennas (typically reflector antennas that are 1 meter in diameter). Mobile transmit antennas used for aeronautical applications should have low aerodynamic drag, be lightweight, have low power consumption and be of
20 relatively small size. For all these reasons, the antenna aperture of the transmit antenna 74 is preferably smaller than a conventional VSAT antenna. VSAT antennas

are sized to create an antenna beam that is narrow enough to illuminate a single FSS satellite along the geosynchronous arc. This is important because FSS satellites are spaced at 2° intervals along the geosynchronous arc. The smaller than normal antenna aperture of the transmit antenna 74 used with the present invention, in some instances, may create an antenna beam that is wide enough to irradiate satellites that are adjacent to the target satellite along the geosynchronous arc, which could create an interference problem. This potential problem is eliminated by employing spread spectrum modulation techniques on the return link transmissions as well. The transmitted signal from the transmit antenna 74 is spread in frequency to produce an interfering signal at the adjacent satellite that is below the threshold EIRP spectral density at which the signal would interfere. It will be appreciated, however, that spread spectrum modulation techniques may not be required if the angular spacing between satellites within a given coverage region is such that interference will not be a problem.

It will be appreciated that the system 10 of the present invention provides a means for providing bi-directional data content transfer to a large plurality of independent users on-board a large number of mobile platforms. The system 10 further enables data content such as rebroadcast video services, broadcast video services and other forms of data content to be provided in real time to a large plurality of mobile platforms such as aircraft, ships or virtually any other form of mobile platform carrying individuals who desire to access ground-based data content

sources or to view live television and programming. The system further allows multiple mobile platforms within a given coverage region to communicate with one or a plurality of transponders within the given coverage region and to transmit data content via a satellite back to a ground-based control system. Accordingly, individual
5 users on-board the mobile platform are able to independently access and obtain various forms of data content as well as selected channels of live television programming. Importantly, the system 10 of the present invention is scalable to accommodate large or small pluralities of mobile platforms, and also scalable over many satellites and coverage regions.

10 Those skilled in the art can now appreciate from the foregoing description that the broad teachings of the present invention can be implemented in a variety of forms. Therefore, while this invention has been described in connection with particular examples thereof, the true scope of the invention should not be so limited since other modifications will become apparent to the skilled practitioner upon a study
15 of the drawings, specification and following claims.

WHAT IS CLAIMED IS:

1. A system for providing data content to a plurality of mobile platforms via at least one satellite having at least one radio frequency (RF) transponder, and for transmitting data content from said mobile platforms via said RF transponder to a ground-based control center.

5 an independent mobile system associated with each said mobile platform and carried by each said mobile platform;

a ground-based antenna system associated with said ground-based control center for transmitting encoded RF signals representative of said data content via said RF transponder to said mobile system;

10 each said mobile system comprising:

a steerable transmit antenna and a steerable receive antenna;

a communications subsystem responsive to each of

said antennas for generating baseband video signals and

data signals from said encoded RF signals received by

15 said receive antenna, and for producing encoded RF signals from data transmissions input by each of a plurality of occupants;

a data content management system for filtering of portions of said data content not addressed to occupants

20 on said mobile platform;

a network for distributing said baseband video signals and said data signals output from said data content management system to said occupants, said network including a plurality of access stations whereby individual occupants receive only specific subportions of said baseband video signals and said data signals relating to previous information selections made by said occupants; and

said independent mobile system also operating to transmit said signals input by each of said occupants from each of said access stations, via said RF transponder, to said ground-based antenna.

2. The system of claim 1, wherein said access stations are adapted to be coupled to personal computing devices operated by each of said occupants.

3. The system of claim 1, wherein said data content management system comprises a file server.

4. The system of claim 1, wherein said satellite comprises a plurality of RF transponders, and wherein said ground based control center designates one of said

transponders to communicate in dedicated fashion with a designated one of said mobile platforms.

5. The system of claim 1, wherein said network comprises a local area network.

6. A system for providing real time video signals to a mobile receiving platform via a satellite having at least one radio frequency (RF) transponder, the system comprising:

a ground based system for transmitting RF signals representative of said video

5 signals to said satellite;

a mobile receiving system disposed on said mobile receiving platform comprising:

an antenna for receiving said RF signals from said RF transponder;

10 an antenna control system for use in steering said antenna to track said satellite as said mobile receiving platform is in motion;

15 a communications system responsive to signals received by said antenna for generating baseband video signals in accordance therewith;

20 a data content management system responsive to said communications system for determining which portions of said baseband video signals are to be transmitted to each of a plurality of access stations on said mobile receiving platform for viewing by individuals on said mobile receiving platform; and

5 a distribution system for routing said portions of
said baseband video signals to specific ones of said
access stations in response to requests by said
occupants, such that each said occupant receives only a
portion of said baseband video signals in accordance with
said request made by each said occupant.

7. The system of claim 6, wherein said communications system comprises
a plurality of integrated receiver/decoders for decoding, demodulating and digital-to-
analog converting received RF signals into said baseband video signals.

8. The system of claim 6, wherein said data content management system
comprises a server.

9. The system of claim 6, wherein said baseband video signals represent
live television signals.

10. The system of claim 6, wherein said baseband video signals represent
direct broadcast television signals.

11. The system of claim 6, wherein said ground based system comprises a network operations center for managing accounting and billing operations associated with access to the system by each user.

12. The system of claim 6, wherein said ground segment operates to transmit encoded data signals to said transponder of said satellite; and

wherein said communications system operates to de-modulate and D/A convert said RF signals to produce said baseband data signals.

13. A system for supplying a plurality of channels of data content to a plurality of independent mobile receiving platforms, wherein each said mobile receiving platform has a plurality of occupants, and for receiving data content transmitted from said mobile receiving platform by said occupants, said system

5 comprising:

a ground based antenna for transmitting encoded radio frequency (RF) signals representing said data content;

at least one satellite having a plurality of RF transponders in orbit over a desired geographical coverage area within which said mobile platforms are travelling,

10 for transponding said encoded RF signals;

a mobile receiving system disposed on each said mobile receiving platform, each said mobile system comprising:

an antenna system including a receive antenna for receiving said encoded RF signals from a designated one of said RF transponders;

15

a transmit antenna for transmitting said data content to a designated one of said RF transponders;

an antenna control system for steering said transmit and receive antennas to track said satellite as said mobile receiving platform is in motion;

20

a communications system responsive to said

encoded RF signals received by said receive antenna for demodulating and decoding said encoded RF signals to produce baseband video signals and data signals;

5 said communications system including a system for transmitting data content from each of said occupants, via said transmit antenna, to said designated one of said transponders;

10 a data content management system responsive to said receiver system for determining which portions of said baseband video signals and which portions of said data signals are to be transmitted to specific ones of a plurality of access stations on said mobile receiving platform for use by said occupants of said mobile receiving platform; and

15 a network system for routing said portions of said baseband video signals and said data signals to specific ones of said access stations in response to requests by said occupants, such that each said occupant receives only a requested portion of said baseband video signals
20 or a requested portion of said data signals.

14. The system of claim 13, wherein said communications system comprises a plurality of integrated receiver/decoders.

15. The system of claim 13, wherein said data content management system comprises a server.

16. The system of claim 13, further comprising a data system for supplying crew information services to said data content management system.

17. The system of claim 13, further comprising an air telephone system on board said mobile platform for transmitting data services to at least one ground based voice telephony receiving station within said coverage area.

18. A system for enabling individual occupants on board a moving platform to transmit and receive data content in real time from a ground based data source, said system comprising:

a ground based system for transmitting radio frequency (RF) signals
5 representative of said data content obtained from a data content source;

a satellite system having at least one RF transponder for transponding RF signals received from said ground based system to said mobile platform, and transponding RF signals received from said moving platform to said ground based system;

10 a mobile communications system disposed on said mobile platform including;

a receive antenna for receiving RF signals from
said RF transponder;

a transmit antenna for transmitting RF signals to
said RF transponder;

15 a communications subsystem in communication
with said receive antenna and said transmit antenna for
converting said received RF signals into data content, and
for converting user data transmitted by said occupants
into RF signals to be transmitted by said transmit antenna
20 to said RF transponder; and

a data content management system for receiving
said data content from said communications subsystem
and determining which subportions of said data content is
to be distributed to specific ones of said occupants; and

5 a distribution system for distributing said
subportions of said data content to said occupants such
that each said occupant receives only specific ones of
said subportions of said data content in accordance with
previous information transmissions made by each said
10 occupant.

19. The system of claim 18, wherein said distribution system comprises a local
area network (LAN).

20. The system of claim 18, wherein said distribution system further comprises
a plurality of independent access stations capable of interfacing with an electronic
device of an occupant of said mobile platform.

21. A system for facilitating bi-directional communication between a ground-based control center and a plurality of mobile platforms, of data content via a satellite having a plurality of (RF) transponders, said system comprising:

a ground based antenna for transmitting encoded RF signals from said ground-based control center representing said data content;

a mobile receiving system disposed on each said mobile receiving platform, each said mobile receiving system comprising:

a steerable receive antenna for receiving said encoded RF signals from a designated one of said RF transponders of said satellite;

an antenna control system for steering said receive and transmit antennas to track said satellite as said mobile receiving platform is in motion;

a communications system responsive to said encoded RF signals received by said receive antenna for generating output signals representative of live television programming and Internet data;

a server responsive to said communications system for filtering off said portions of said live television programming and portions of said Internet data representing data content which have not been requested

by any of said occupants, and filtering off portions of said data content not directed to any occupant of said aircraft; and

5

a network system for routing said portions of said output signals and portions of said Internet data to specific ones of a plurality of access stations in accordance with inputs made at said access stations by each of said occupants.

22. The system of claim 21, wherein said steerable receive antenna comprises an electronically steerable, phased array antenna.

23. A method of transmitting data content between a mobile receiving platform and a ground-based control segment, comprising the steps of:

using a ground-based antenna associated with said ground-based control segment to transmit encoded radio frequency (RF) signals corresponding to said data

5 content;

using a satellite having a plurality of transponders to receive said encoded RF signals and to transpond said encoded RF signals, via one of said transponders designated by said ground-based control segment, to said mobile receiving platform;

10 using a steerable antenna carried by said mobile receiving platform to receive said encoded RF signals;

causing said steerable antenna to track said satellite as said mobile receiving platform is in motion to thereby maintain constant radio frequency contact with said satellite;

15 decoding and demodulating said encoded RF signals to produce a plurality of data signals representative of said data content;

filtering off said data signals that have not been requested by any occupant of said mobile platform to produce a limited subset of data content;

20 distributing selected portions of said subset of data content to access stations associated with said occupants in accordance with requests of each said occupant such that each said occupant receives only selected portions of said subset of data


content corresponding to his/her previously submitted requests; and

transmitting encoded RF signals representative of information requests from
said users to said satellite.

ABSTRACT OF THE DISCLOSURE

A system for bi-directional data content transfer between a plurality of mobile platforms, such as aircraft or cruise ships, and a ground-based control segment. The system includes the ground-based control segment, a space segment and a mobile system disposed on each mobile platform. The ground-based control segment includes an antenna which is used to transmit encoded RF signals representative of data content to the space segment. The space segment includes a plurality of satellite transponders, with one of the transponders being designated by the ground-based control segment to transpond the encoded RF signals to the mobile system. The mobile system includes steerable receive and transmit antennas. The receive antenna receives the encoded RF signals from the satellite transponder, which are thereafter decoded, demodulated, D/A converted by a communications subsystem and transmitted to a server. The server filters off that data content not requested by any occupants on the mobile system. A local area network (LAN) receives the remaining data content and provides same to individual users on the mobile platform in accordance with previously submitted programming requests or data input by the users at access stations associated independently with each user. The transmit antenna is used to transmit data content from laptop computers, PDAs or other user electronic devices coupled to the access stations back to the designated satellite transponder. The satellite transponder then transponds the data back to the antenna of the ground-based control segment.

Fig. 1

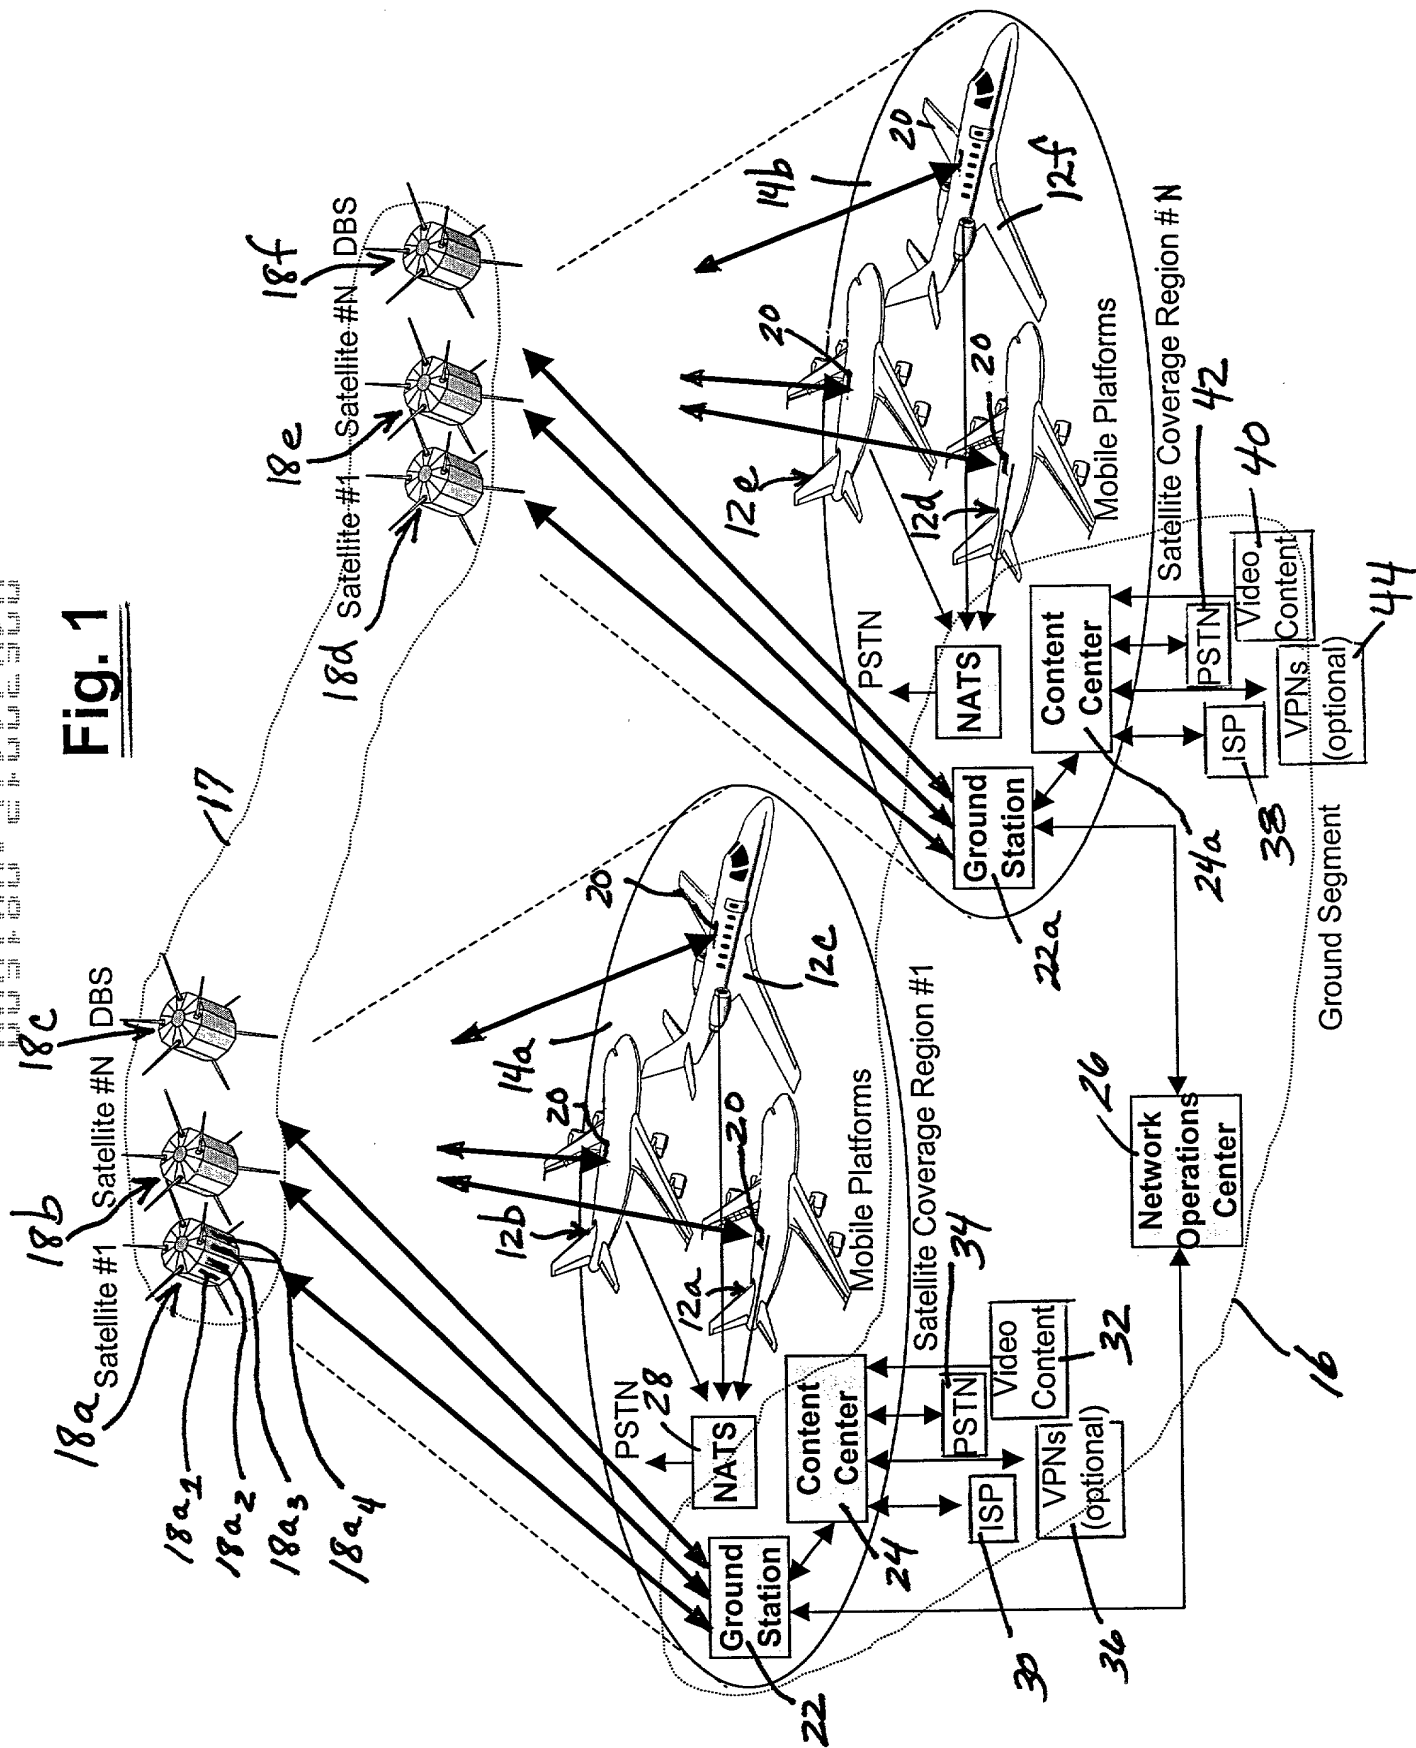

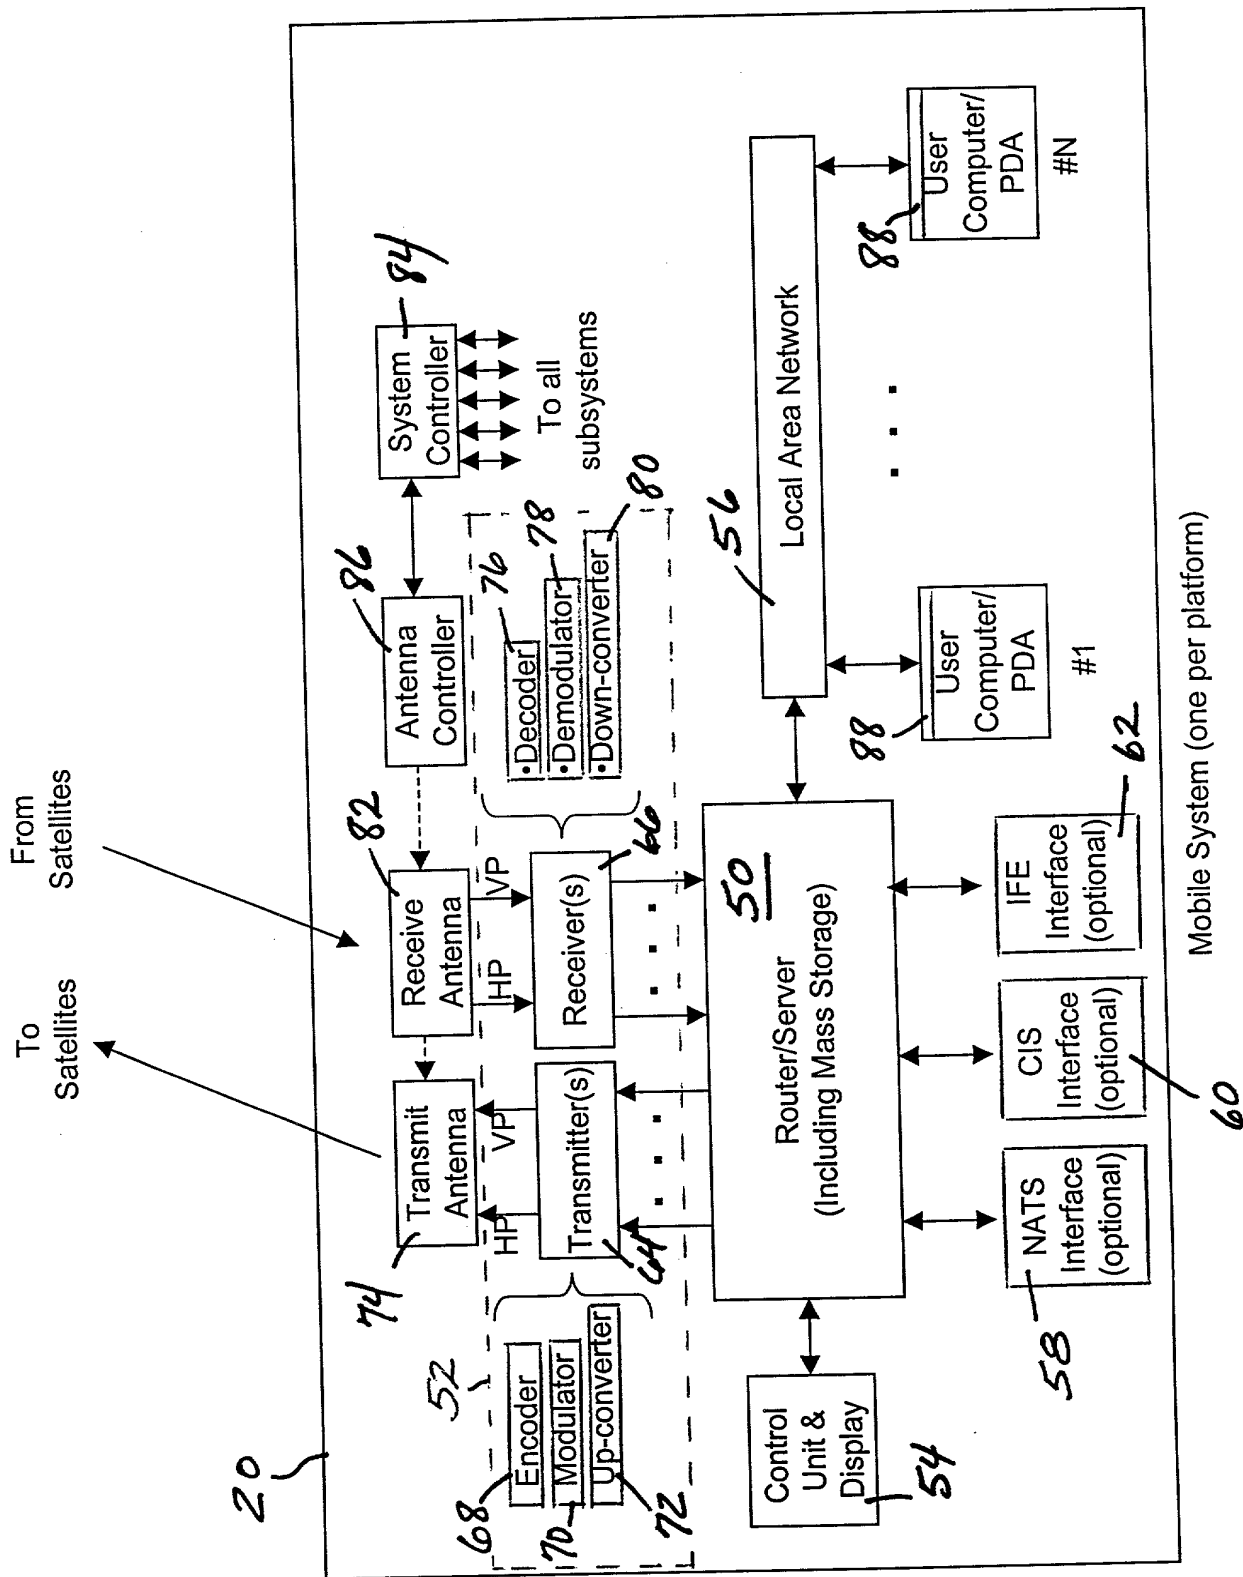


Fig. 2 Mobile System

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR PROVIDING BI-DIRECTIONAL DATA SERVICES AND
LIVE TELEVISION PROGRAMMING TO MOBILE PLATFORMS

the specification of which (check one)

☒ [x] is attached hereto.

☐ [] was filed on _____ as Application
Serial No. _____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to the patentability of the invention claimed in this application, or information that is material to the examination of this application, in accordance with Title 37, Code of Federal Regulations, section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

			Priority Claim	
			Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year filed)		
_____ (Number)	_____ (Country)	_____ (Day/Month/Year filed)		
_____ (Number)	_____ (Country)	_____ (Day/Month/Year filed)		

DECLARATION AND POWER OF ATTORNEY

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States Provisional application(s) listed below:

PRIOR PROVISIONAL APPLICATIONS

(application serial number)

(Month / Day / Year filed)

(application serial number)

(Month / Day / Year filed)

I hereby claim the benefit under Title 35, United States Code, section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status - patented, pending, abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint Paul C. Cullom, Reg. No. 25,580; Ann K. Galbraith, Reg. No. 33,530; Robert L. Gullette, Reg. No. 26,899; James P. Hamley, Reg. No. 28,081; John C. Hammar, Reg. No. 29,928; Lynn H. Hess, Reg. No. 25,160; Lawrence W. Nelson, Reg. No. 34,684 and Robert R. Richardson, Reg. No. 40,143 of The Boeing Company, Seattle, King County, Washington; and Mark D. Elchuk, Reg. No. 33,686 and each principal, attorney of counsel, associate and employee of Harness, Dickey & Pierce, P.L.C., who is a registered Patent Attorney, my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Harness, Dickey & Pierce, P.L.C., P. O. Box 828, Bloomfield Hills, Michigan 48303 (248) 641-1600.

Full name of first inventor: Greg Alan Bengault

Inventor's signature: _____

Date: _____

Residence: 13504 SE 339th Ct., Auburn, Washington 98092

Citizenship: U.S.

Post Office Address: same

DECLARATION AND POWER OF ATTORNEY

Full name of second inventor: Jeffrey Paul Harrang

Inventor's signature: _____

Date: _____

Residence: 24239 NE 7th Place, Redmond, Washington 98053

Citizenship: U.S.

Post Office Address: same

Full name of third inventor: William R. Richards

Inventor's signature: _____

Date: _____

Residence: 24808 SE 133rd Way, Issaquah, Washington 98027

Citizenship: U.S.

Post Office Address: same

Full name of fourth inventor: Michael Gabriel Lynch

Inventor's signature: _____

Date: _____

Residence: 2770 Alki Ave SW, Seattle, Washington 98116

Citizenship: U.S.

Post Office Address: same

Full name of fifth inventor: Michael de La Chapelle

Inventor's signature: _____

Date: _____

Residence: 242 W. Lake Sammamish SE, Bellevue, Washington 98008

Citizenship: U.S.

Post Office Address: same

DECLARATION AND POWER OF ATTORNEY

Full name of sixth inventor: Paulus Johannes Martens

Inventor's signature: _____

Date: _____

Residence: 1407 SW 126th St., Seattle, Washington 98146

Citizenship: U.S.

Post Office Address: same